

Small Format Mixers

XENYX 302USB

Premium 5-Input Mixer with XENYX Mic Preamp and USB/Audio Interface

- Ultra-compact and ultra-low noise analog mixer with USB/Audio interface
- Powered through USB or external adaptor
- Built-in stereo USB/Audio interface to connect directly to your computer
- Free audio recording, editing and podcasting software plus 150 instrument/effect plug-ins and ultra-low latency driver downloadable
- State-of-the-art XENYX Mic Preamp comparable to stand-alone boutique preamps
- Neo-classic "British" 2-band graphic EQ for warm and musical sound
- 2-Track input assignable to Headphone or Main Mix output
- Main Mix plus separate Phones output
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany



Need a handy little mixer you can grab with your laptop on the way out the door? Or maybe you don't want to give up valuable desktop real estate to a large mixer? The new XENYX 302USB is ideally suited for a small home studio or the on-the-go recording enthusiast. At approximately 4" long and 5" wide (117 x 135 mm), the XENYX 302USB respects your desk space, while providing a phantom-powered XLR & 1/4" combination socket, stereo USB/Line channel plus a dedicated 2-Track input.

Small, but mighty!

Don't let the XENYX 302USB's diminutive size fool you—this little gem is loaded with features typically reserved for larger, more expensive mixers. For instance, we equipped the Mic input with our XENYX mic preamp,


which is legendary for its sonic clarity and high-headroom performance, and we included phantom power for use with high-quality condenser mics. We also gave the Mic and Line/USB channels our 2-band British-style EQs (Low and High), and provide a 2-Track input that can be assigned to either the Main Mix or Phones.

You can even power the XENYX 302USB from your computer's USB port, which is great for capturing the sounds of migratory birds in flight, or for posting your podcast straight to the Web. Sports announcers, radio and TV reporters will definitely want one of these in their field bag. Incredible sonic performance, versatility and extreme value in a small package—that's the XENYX 302USB!




XENYX 302USB


Front Panel

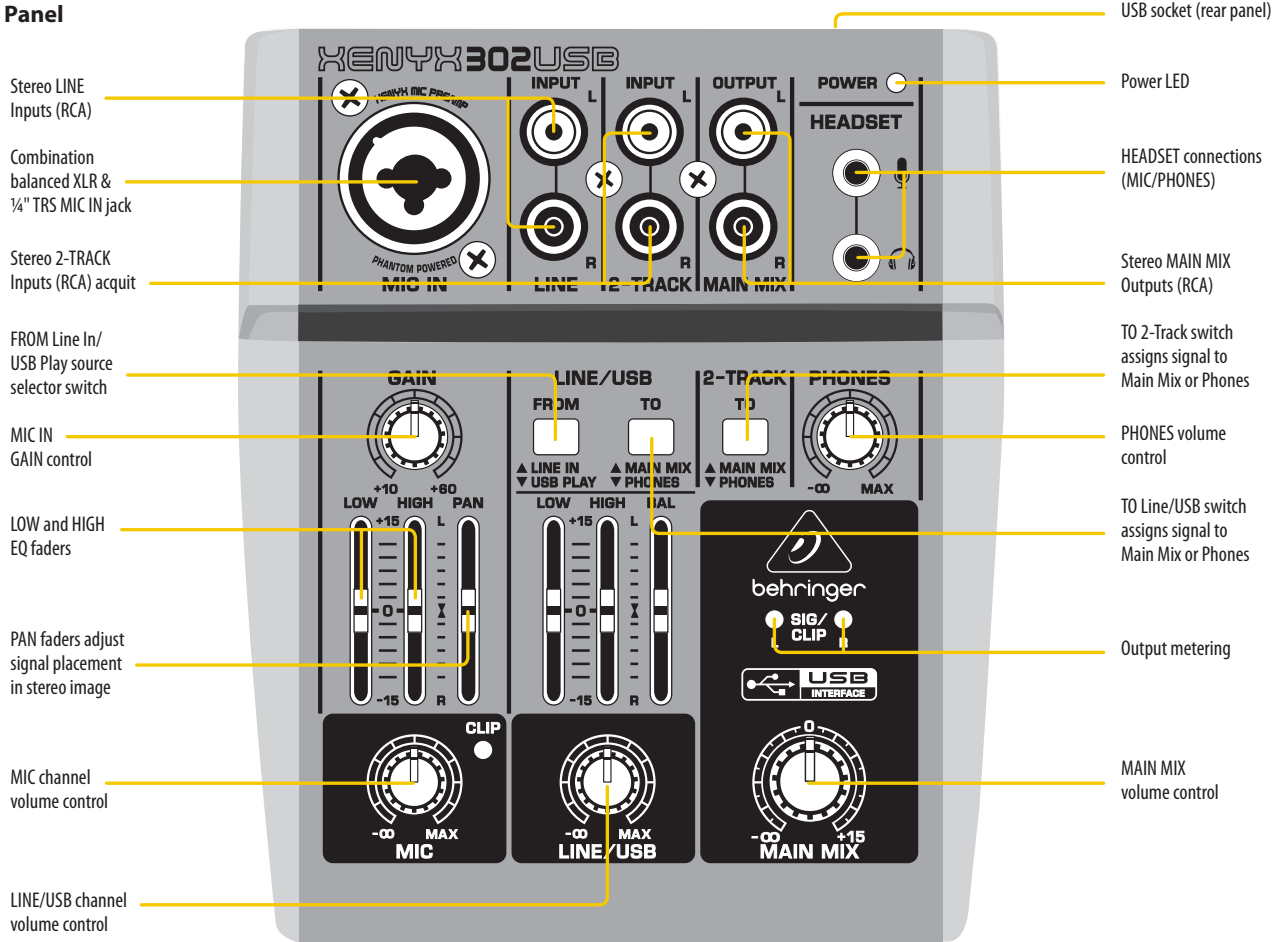

XENYX 302USB recording setup

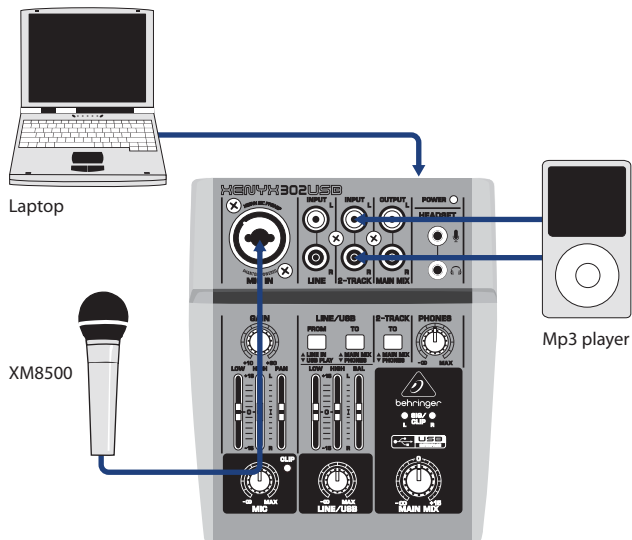

XENYX 302USB podcasting setup

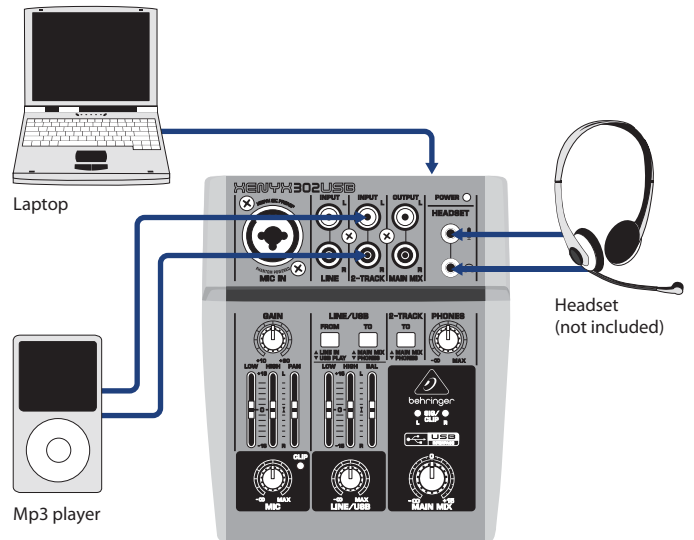

XENYX 302USB

Specifications

Mic Input

Microphone Input

Type	XLR/¼" combo connector, electronically balanced
------	---

Mic E.I.N. (20 Hz - 20 kHz)

@ 0 Ω source resistance	-130 dB / -133.1 dB A-weighted
-------------------------	--------------------------------

@ 50 Ω source resistance	-128 dB / -131.5 dB A-weighted
--------------------------	--------------------------------

@ 150 Ω source resistance	-127 dB / -129.8 dB A-weighted
---------------------------	--------------------------------

Frequency response (-1 dB)	18 Hz - 40 kHz
----------------------------	----------------

Frequency response (-3 dB)	< 10 Hz - 75 kHz
----------------------------	------------------

Gain range	+15 dB to +55 dB
------------	------------------

Max. input level	+12 dBu @ +10 dB Gain
------------------	-----------------------

Impedance	2 kΩ
-----------	------

Signal-to-noise ratio	98 dB / 101 dB A-weighted (0 dBu in @ +22 dB Gain)
-----------------------	--

Distortion (THD+N)	0.013%
--------------------	--------

Frequency Response (Mic In → Main Out)

18 Hz - 40 kHz	+0 dB / -1 dB
----------------	---------------

10 Hz - 75 kHz	+0 dB / -3 dB
----------------	---------------

Stereo Line Input

Type	RCA jacks, unbalanced
------	-----------------------

Impedance	6 kΩ
-----------	------

Gain range	-∞ to +20 dB
------------	--------------

Max. input level	+20 dBu
------------------	---------

2-Track In

Type	RCA jacks, unbalanced
------	-----------------------

Impedance	20 kΩ
-----------	-------

Max. input level	+20 dBu
------------------	---------

Headset Mic In

Type	¼" TRS mini jack
------	------------------

Impedance	6 kΩ
-----------	------

Max. input level	+22 dBu @ Gain Min
------------------	--------------------

Equalizer

Low	80 Hz / ±15 dB
-----	----------------

High	12 kHz / ±15 dB
------	-----------------

Main Outputs

Type	RCA, unbalanced
------	-----------------

Impedance	470 Ω
-----------	-------

Max. output level	+22 dBu
-------------------	---------

Phones Output

Type	¼" TRS mini jack
------	------------------

Max. output level	+7 dBu / 150 Ω
-------------------	----------------

System Data (Noise)

Main mix @ -∞, channel fader @ -∞	-96 dBu / -101 dBu A-weighted
-----------------------------------	-------------------------------

Main mix @ 0 dB, channel fader @ -∞	-82 dBu / -87 dBu A-weighted
-------------------------------------	------------------------------

Main mix @ 0 dB, channel fader @ 0 dB	-80 dBu / -85 dBu A-weighted
---------------------------------------	------------------------------

External USB Switching Power Supply

Mains voltage	100-240 V, ~ 50/60 Hz
---------------	-----------------------

Power consumption	0.9 W
-------------------	-------

Power connector	USB, type A
-----------------	-------------

USB

Connector	Type B
-----------	--------

Converter	16-bit
-----------	--------

Sample Rate	48 kHz
-------------	--------

Size/Weight

Dimensions (H x W x D)	1.8 x 4.5 x 5.4" 46 x 114 x 136 mm
------------------------	---------------------------------------

Weight	0.83 lbs / 0.38 kg
--------	--------------------

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

Europe MUSIC Group Services EU GmbH
Tel.: +49 2154 9206 4149 / Fax: +49 2154 9206 4199

USA/Canada MUSIC Group Services US Inc.
Tel.: +1 425 672 0816 / Fax: +1 425 673 7647

Singapore MUSIC Group Services SG (Pte.) Ltd
Tel.: +65 6845 1800 / Fax: +65 6214 0275

Australia MUSIC Group Services AU Pty Ltd
Tel.: +61 03 9877 7170 / Fax: +61 03 9877 7870

Japan MUSIC Group Services JP K.K.
Tel.: +81 3 5281 1180 / Fax: +81 3 5281 1181

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER IS PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULFILLERS AND RESELLERS ONLY. ALL RIGHTS RESERVED. © 2011 MUSIC Group IP Ltd. Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. 985-10000-00484