


IPA-60/120/240/360 MIXING AMPLIFIER

FEATURES

- Power output RMS 60W(IPA-60), 120W(IPA-120), 240W(IPA-240), 360W(IPA-360)
- 2U size, streamlined design
- Able to equip a rack with bracket
- Priority and mute control function on MIC 1 and CHIME
- 4 MIC inputs and 3 auxiliary inputs
- Able to supply phantom power on MIC 1
- Amplifier input and pre-amplifier output
- 4 tone CHIME and 3 band tone control
- Able to broadcast all call or 5 individual zone by selector
- Applying a speaker to a monitor
- Option: 1 CD/MP3 & TUNER Module (IPA-CDR/U)

DRAWING

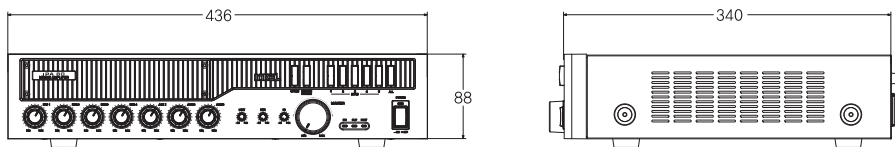

SPECIFICATIONS

	IPA-60	IPA-120	IPA-240	IPA-360
POWER OUTPUT	60W	120W	240W	360W
CLASS	AB	AB	H	H
FUNCTION	4 TONE CHIME, MONITOR SPEAKER, 5 ZONE & ALL SELECTOR			
TONE CONTROL	3 BAND			
INPUT SENSITIVITY	MIC : -60dB/600Ω, AUX : -20,-10,-3dB/20KΩ			
FREQUENCY RESPONSE	MIC : 80Hz-12kHz, AUX : 60Hz-15kHz			
T.H.D	MIC: LESS THAN 1%, AUX : LESS THAN 0.5%			
S/N	MIC : 55dB, AUX : 68dB			
POWER SOURCE	AC 100~240V, 50/60Hz			
POWER CONSUMPTION	75W	130W	140W	170W
DIMENSION	436(W) X 88(H) X 340(D) mm			
WEIGHT	8,6kg	10,5kg	12,4kg	14,6kg