




Feature

- * Secure and reliable audio-specific switching power supply
- * Light&solid shape,2U height standard cabinet
- * LC soft-switching technology
- * SMT production technology
- * High efficiency 3 step H class circuit
- * Intelligent temperature control & variable cooling fan
- * Link 2 ohm stereo load easily&reliably
- * Apply in high-class commercial KTV room&outdoor performance, and large conferenceroom

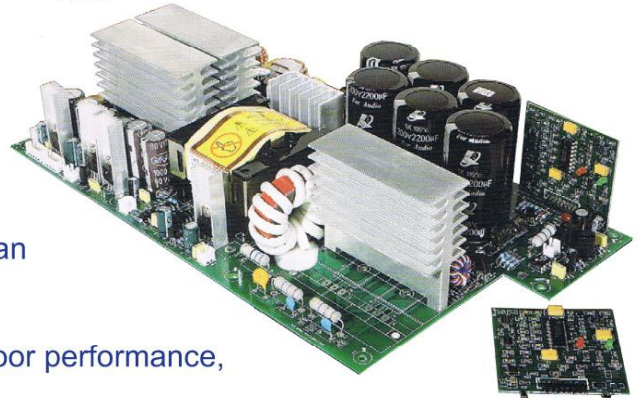

RMS series specification	RMS-3	RMS-5	RMS-8	RMS-10	RMS-12
8 ohm stereo output power	300W	500W	800W	1000W	1200W
4 ohm stereo output power	450W	750W	1200W	1500W	1800W
2 ohm stereo output power	580W	980W	1500W	1950W	2300W
8 ohm bridge output power	900W	1500W	2400W	3000W	3600W
4 ohm bridge output power	1160W	1960W	3000W	3900W	4600W
Dimension (WxDxH)	483mm x 462mm x 89 mm				