


DESCRIPTION

The AT-063P is a flush-mounted wall attenuator and uses a transformer which allows connection of a wide range of loads (under 6W). Volume can be adjusted in five steps. The AT-063P features push-in terminals, each of which accepts two conductors for easy bridging.


SPECIFICATIONS

| | |
|--------------|---|
| Input Range | 0.5 - 6 W |
| Attenuation | 5 steps (0 dB, -6 dB, -12 dB, -18 dB, OFF) |
| Usable Cable | 600 V vinyl-insulated cable (Indoor Vinyl or Heat-resistant Indoor Vinyl cable) Solid cable: $\phi 0.8 - \phi 1.2$ mm Stranded cable (7 cores): 0.75 - 1.25 mm ² |
| Terminal | Push-in connector (bridging terminal) |
| Finish | Knob, panel, plate: ABS resin, milk white Case: ABS resin, black |
| Dimensions | 70 (W) x 120 (H) x 55 (D) mm (with plate) |
| Accessory | Plate \times 1, Plate mounting screw \times 2, Box mounting screw \times 2 |


APPEARANCE

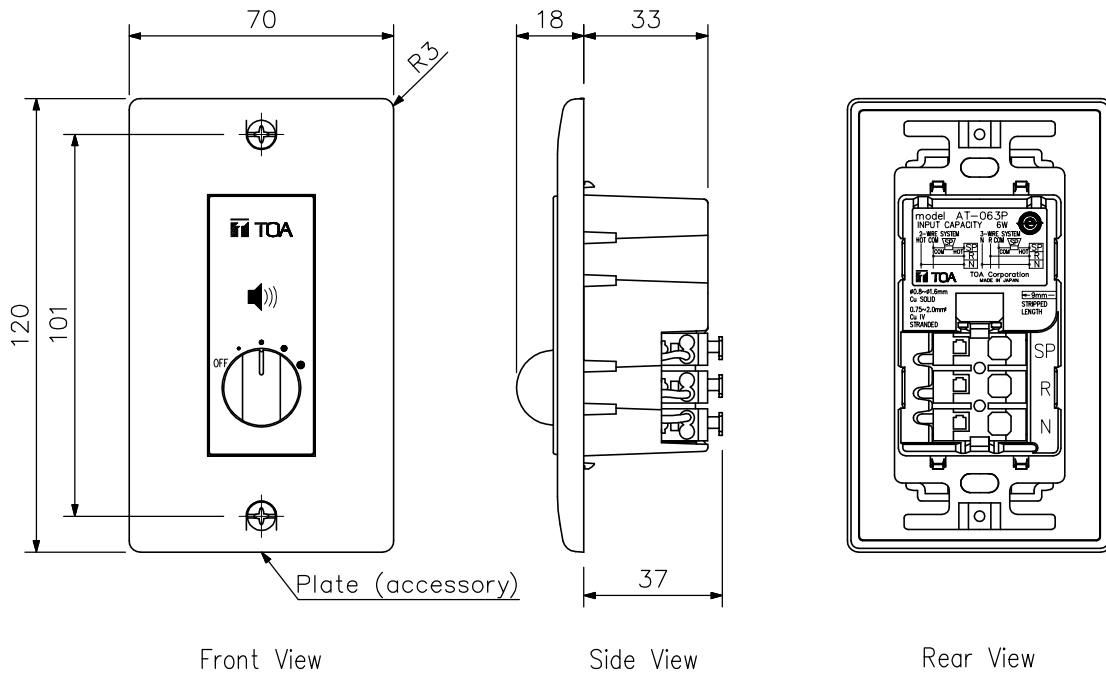

Speaker
Output



3-WIRE CONNECTION



2-WIRE CONNECTION

UNIT:mm SCALE:1/2